



BINQ FIXED WINDOW SECTION DETAIL


BINQ FIXED WINDOW PLAN DETAIL

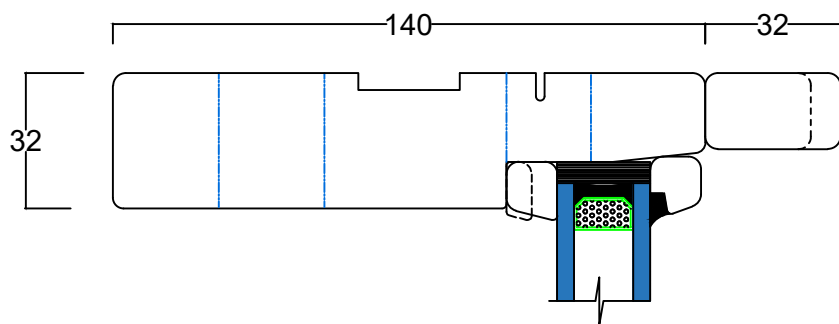


Jamb Fixing:
Concealed fixing from here
if possible

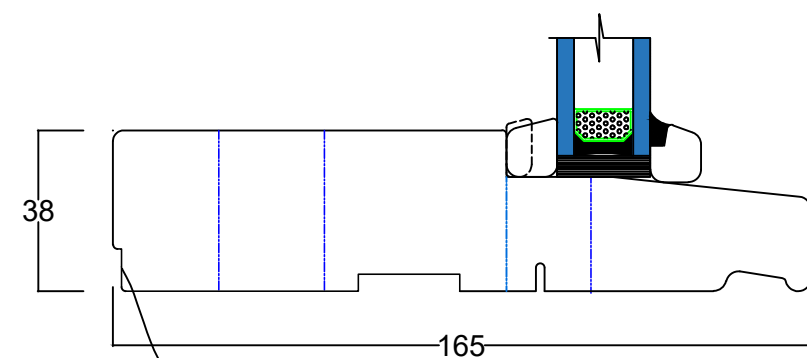

Flashing:
Sills must be flashed from this point

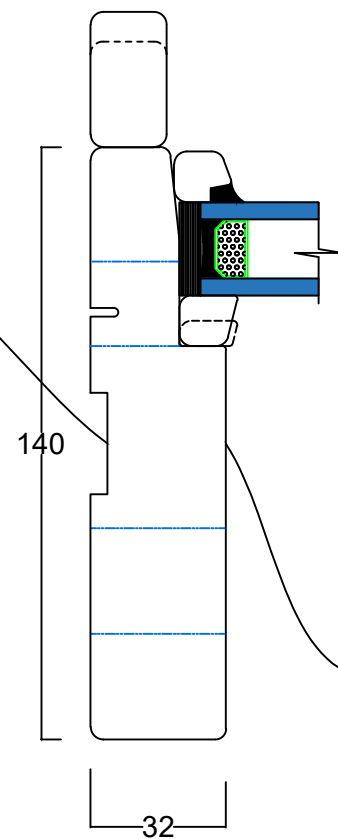

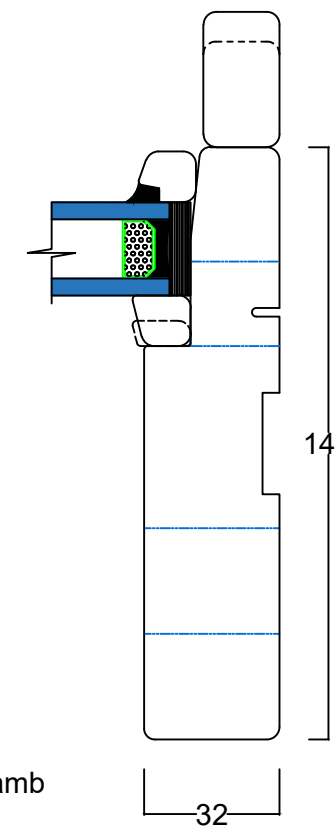

Jamb Fixing:
Fix at center of reveal
Minimum 2 fixing per jamb
>1200mm height, then minimum 3 fixing per jamb
Fix at 100mm from head
Fix at 100mm from sill
Fix at center of jamb
Drill & counter-sink
If fixing is exposes raw timber, then apply coating to seal
Alternatively, use Wurth screws & matching screw caps
caps available in black, brown and white
If using screw caps, screws must finish flush with jamb



General Notes:

- The information provided here are guidelines only. Always adhere to Australian standards / BCA
- The installation and correct operation of these units in the installed situation is the responsibility of the installer. This includes but not limited to the correct flashing of doors and windows.
- Screw fixings must be used, DO NOT use nails
- The installed units must be plumb, square and level

Inside

Fixed Window		PROJECT			REV
PART NO. VARIOUS					
DRAWN BY/DATE AG 22/03/2019		REFERENCE		SHEET 1 / 1	
MATERIAL VARIES			SCALE @ A3 DNS		<small>THIS DRAWING IS THE PROPERTY OF BINQ. Information contained herein is confidential and is not to be used or disclosed to third parties without the written consent of binq</small>
FINISH/TREATMENT		$X \pm 0.1$ $\times X \pm 0.01$ $\pm 0.25'$	WEIGHT 1		